




VERSION	MODIFY	DATE

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



Notes:

- Type: Film to Glass
- Operating Voltage: $\leq 10V$
- Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
- Life Time: $> 1,000,000$ times
- Connect Material: FPC
- Response Time: $\leq 10ms$
- Linearity: $\leq 1.5\%$
- Transmittance: $\geq 80\%$
- Surface Hardness $\geq 3H$ (pencil)
- Operation force: $20g \sim 80g$
- Resistance: X : $200\Omega - 450\Omega$
Y : $500\Omega - 900\Omega$

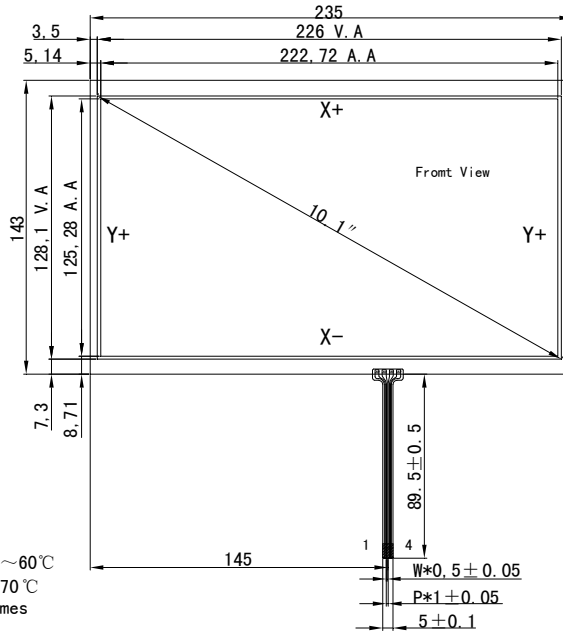

良辰光电有限公司
Lctouch Electronics Co.LTD

MODEL NO.	DRAWN:	DATE:	VERSION:	UNIT:	TOLERANCE:	SCALE:	REV:
TP-10101-01			1.0	MM	± 0.2	1:1	