




VERSION	MODIFY	DATE

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



Notes:

1. Type: Film to Glass
2. Operating Voltage:  $\leq 10V$
3. Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time:  $> 1,000,000$  times
5. Connect Material: FPC
6. Response Time:  $\leq 10ms$
7. Linearity:  $\leq 1.5\%$
8. Transmittance:  $\geq 80\%$
9. Surface Hardness  $\geq 3H$  (pencil)
10. Operation force:  $20g \sim 80g$
11. Resistance: X :  $250\Omega - 450\Omega$   
Y :  $400\Omega - 700\Omega$

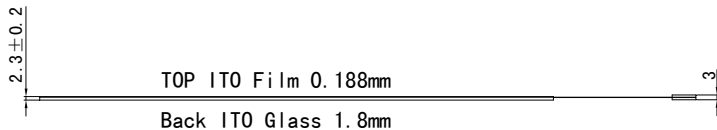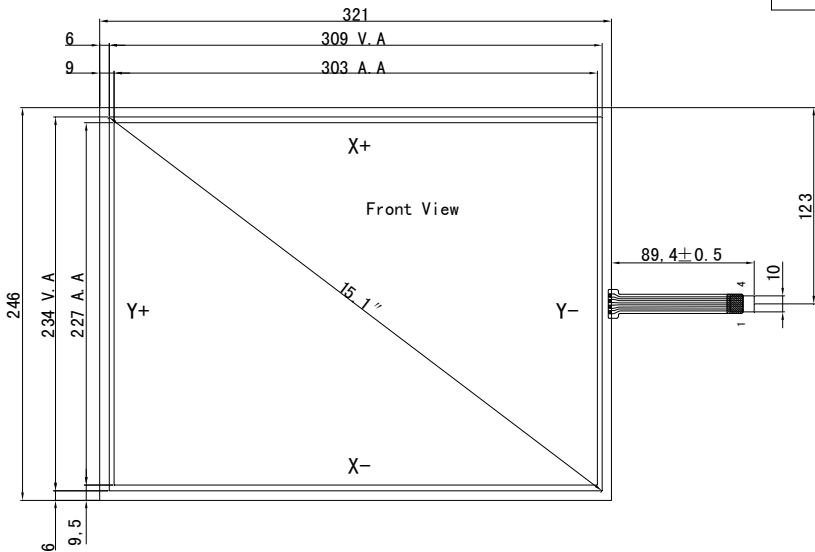

良晨光电有限公司  
Lctouch Electronics Co.LTD

MODEL NO.

TP-15105-01

DRAWN:

DATE:

VERSION:

1.0

UNIT:

MM

TOLERANCE:

$\pm 0.2$

SCALE:

1:1

REV: