



VERSION	MODIFY	DATE

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage: $\leq 10V$
- 3.Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
- 4.Life Time: $>1,000,000$ times
- 5.Connect Material:FPC
- 6.Response Time: $\leq 10ms$
- 7.Linearity: $\leq 1.5\%$
- 8.Transmittance: $\geq 80\%$
- 9.Surface Hardness $\geq 3H$ (pencil)
- 10.Operation force: $20g \sim 80g$
- 11.Resistance: X: $200 \Omega - 450 \Omega$
Y: $550 \Omega - 900 \Omega$

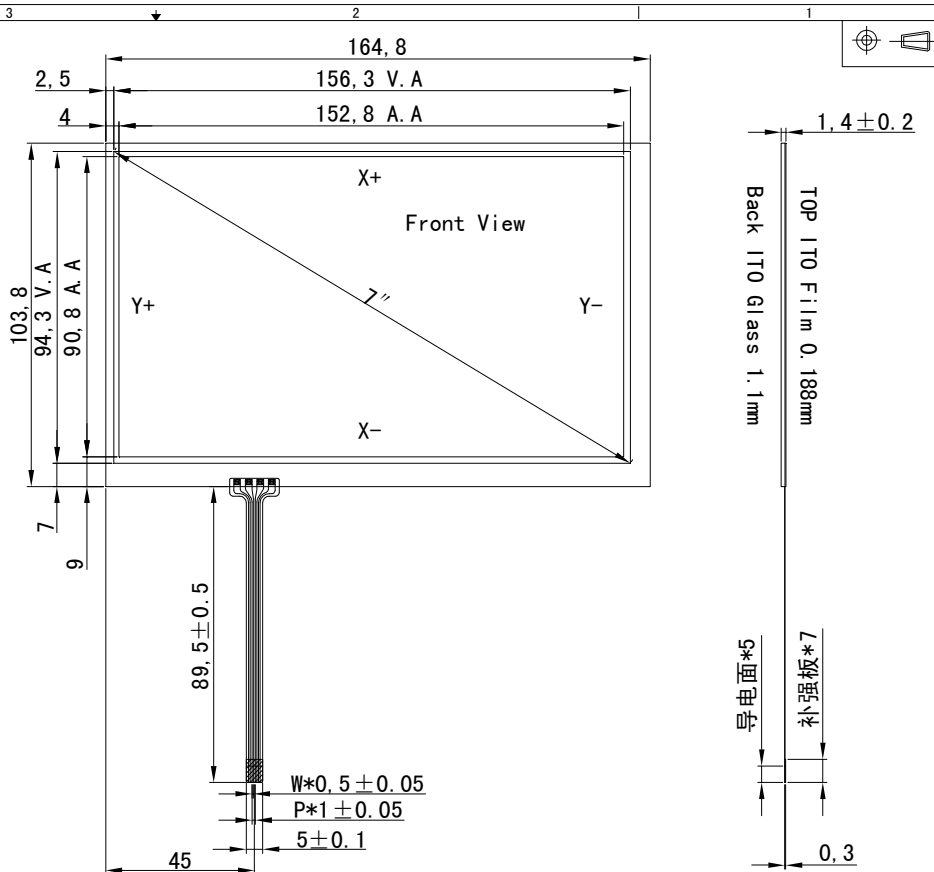

良晨光电有限公司
Lctouch Electronics Co.LTD

MODEL NO.

TP-07007-01

DRAWN:

DATE:

VERSION:

1.0

UNIT:

MM

TOLERANCE:

± 0.2

SCALE:

1:1

REV: