



VERSION	MODIFY	DATE

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:  $\leq 10V$
- 3.Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
- 4.Life Time:  $>1,000,000$  times
- 5.Connect Material:FPC
- 6.Response Time:  $\leq 10ms$
- 7.Linearity:  $\leq 1.5\%$
- 8.Transmittance:  $\geq 80\%$
- 9.Surface Hardness  $\geq 3H$ (pencil)
- 10.Operation force:  $20g \sim 80g$
- 11.Resistance: X:  $200\Omega - 450\Omega$   
Y:  $550\Omega - 900\Omega$

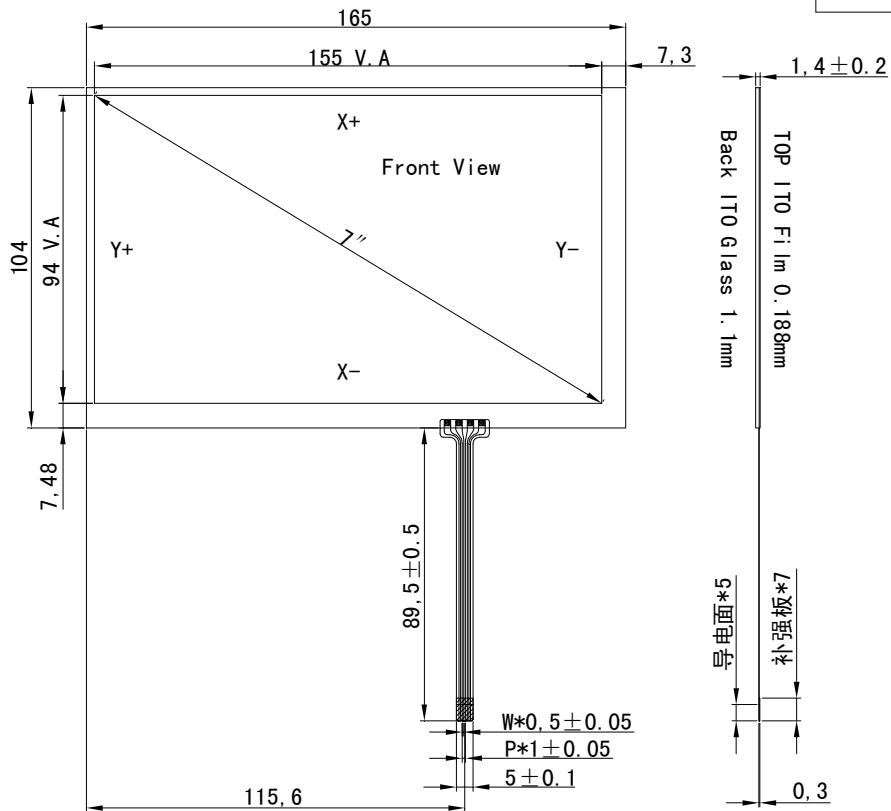

良晨光电有限公司  
Lctouch Electronics Co.LTD

MODEL NO.  
TP-07008-01

DRAWN:

DATE:

VERSION:

UNIT:  
MM

TOLERANCE:  
 $\pm 0.2$

SCALE:  
1:1

REV: